



Actinic BL TL-D(K) Secura

Actinic BL TL-D TL-D 15W/10 Secura 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

Product data

General Information		Voltage (Nom)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	51 V	
Main Application	Reprography (R)	Approval and Application	
Life to 50% Failures (Nom)	11000 h	Mercury (Hg) Content (Nom)	5.5 mg
Useful Life (Nom)	9000 h	UV	
Light Technical		UV-B/UV-A (IEC)	0.2 %
Color Code	10	UV-A Radiation 100Hr (IEC)	3.15 W
Color Designation	Actinic	Product Data	
Chromaticity Coordinate X (Nom)	222	Full product code	871150089858640
Chromaticity Coordinate Y (Nom)	210	Order product name	Actinic BL TL-D TL-D 15W/10 Secura 1SL/25
UV Depreciation at 2000 h	25 %	EAN/UPC - Product	8711500898586
UV Depreciation at 5000 h	40 %	Order code	928024701029
Operating and Electrical		Numerator - Quantity Per Pack	1
Power (Rated) (Nom)	15 W	Numerator - Packs per outer box	25
Lamp Current (Nom)	0.335 A	Material Nr. (12NC)	928024701029


Actinic BL TL-D(K) Secura

Net Weight (Piece)	61.000 g
--------------------	----------

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D TL-D 15W/10 Secura 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

TL-D 15W/10 SECU

Photometric data

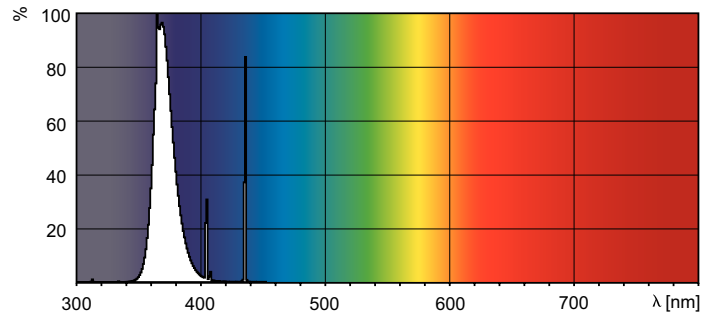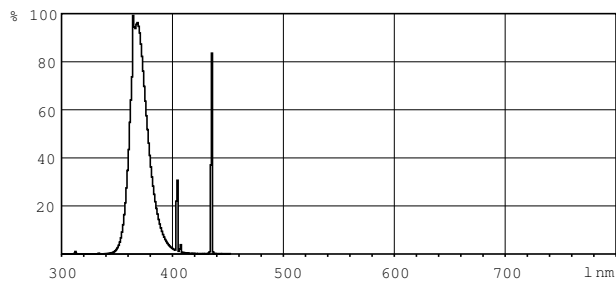

Lightcolor /10

Lightcolor /10

